

# ideal lux | Game Round



## DOWNLIGHT

Die-cast aluminum recessed spotlight with round or square seal, suitable for the installation on plasterboard ceilings. Matt chrome finish, matt white RAL 9001, matt black RAL 9011, matt gold RAL6464. Passively cooled LED; COB-Chip on Board technology for maximum efficiency; available with color temperatures 3000 K; CRI  $\geq$  80; min. 80% of luminous flux remaining after 30000 h duration. Assembling and disassembling without utensils; protection IP20; insulation class II. It can be dimmed with 1-10V and DALI.




Suggestion



Suggestion




Suggestion

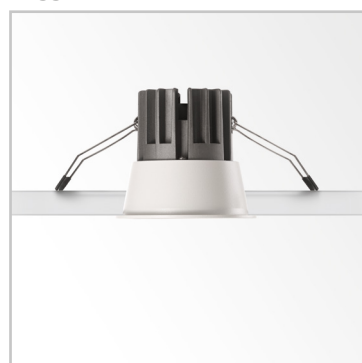

Suggestion

Code	192314
Item name	GAME ROUND BLACK BLACK
Source	LED COB CREE
Power	12W
Driver included	LIFUD
Driver available	1-10V   DALI
Lumen	850 Lm
MacAdam	5SDC
Beam	36°
CCT	3000K
CRI	$\geq$ 85
UGR	<19
LED Life	30.000 h
Insulation class	Class II
IP	20
Material	Aluminum
Warranty	5 years
Net Weight	0,280 Kg
Volume	0,0011 m <sup>3</sup>
Base / Hole	$\varnothing$ 7,4 cm

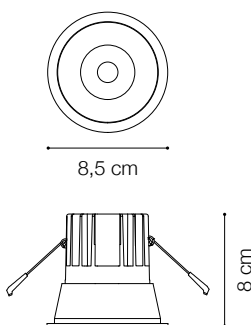



Code	217253
Item name	GAME DRIVER 1-10V
Power	12W
Output	9/40Vdc
Current	300 mA
Measure	150 x 43 x 29 mm



Code	202396
Item name	GAME DRIVER DALI
Power	10W
Output	10/28Vdc
Current	350 mA
Measure	135 x 20 x 30 mm