


# ideal lux | Game Square




## DOWNLIGHT


Die-cast aluminum recessed spotlight with round or square seal, suitable for the installation on plasterboard ceilings. Matt chrome finish, matt white RAL 9001, matt black RAL 9011, matt gold RAL6464. Passively cooled LED; COB-Chip on Board technology for maximum efficiency; available with color temperatures 3000 K; CRI  $\geq$  80; min. 80% of luminous flux remaining after 30000 h duration. Assembling and disassembling without utensils; protection IP20; insulation class II. It can be dimmed with 1-10V and DALI.

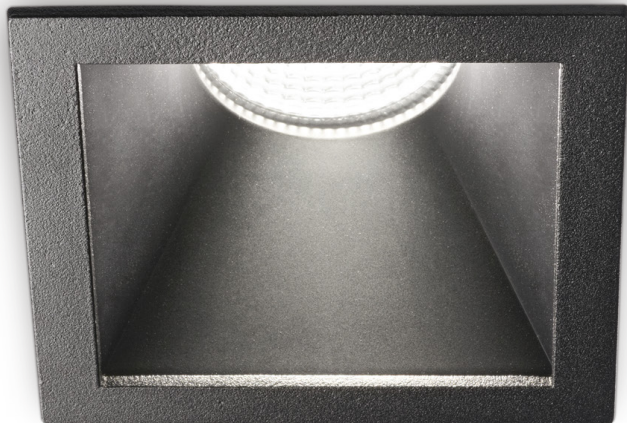

Code	192383
Item name	GAME SQUARE BLACK BLACK
Source	LED COB CREE
Power	11W
Driver included	LIFUD
Driver available	1-10V   DALI
Lumen	850 Lm
MacAdam	SDCM 5
Beam	36°
CCT	3000K
CRI	$\geq$ 85
UGR	<19
LED Life	30.000 h
Insulation class	Class II
IP	20
Material	Aluminum
Warranty	5 years
Net Weight	0,270 Kg
Volume	0,0011 m <sup>3</sup>
Base / Hole	7,5 x 7,5 cm



8,4 cm



12 cm



Code	217253
Item name	GAME DRIVER 1-10V 12W
Power	12W
Output	200 mA
Range	100-400 mA
Measure	150 x 43 x 29 mm



Code	202396
Item name	GAME DRIVER DALI 11W
Power	11W
Output	200 mA
Range	-
Measure	135 x 20 x 30 mm