

# ideal lux | Slot




## PROFILES

Extruded aluminum body with white powder coated surface and PMMA opal cover. Bars with different optional sections: RECESSED version for plasterboard ceilings and SURFACE version for wall or ceiling installation. The linear modules are available in different lengths: 1000, 2000 and 3000 mm. They can be assembled according to the desired design and can be sectioned to size.

Led and driver to be combined for a correct installation. Light source available with color temperature of 2700K, 3000K, 4000K; CRI  $\geq$  80; available with IP20 and IP65 protection.



Suggestion

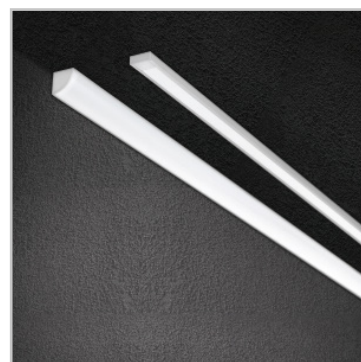

Code	203126
Item name	SLOT SURFACE ANGOLO 2000 mm WH
Material	Aluminum
Net Weight	0,30 Kg
Volume	0,0020 m <sup>3</sup>

