
ideal lux. | Arca

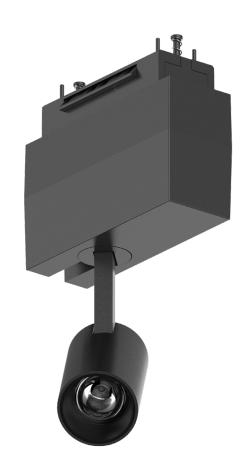

Code 222974

Item name ARCA TRACK 5W 40° 3000K


Source LED SMD CREE

5W Power No Driver included On/Off Driver available 500 Lm Lumen 3SDC MacAdam 40° Beam 3000K CCT ≥80 CRI <19 **UGR**

LED Life 50.000 h
Insulation class Class III

P 20

Material Aluminum
Warranty 5 years
Net Weight 0,200 Kg
Volume 0,0015 m³
Base / Hole 9 x 3,3 cm



10,7 cm

15,7 cm

LINEAR SYSTEM

Extruded aluminum linear system compatible with a wide range of lighting fittings with magnetic fixing and mechanical safety lock. The system is anodized and varnished. It is available in black color and for different kind of installations: ceiling, suspension, or flush in plasterboard ceilings. Modules can be assembledaccording to the desired arrangement. The body section for the ceiling and suspension versions is 42 mm wide and 85 mm high, while the body for recessed version is 86 mm wide and 90 mm high. Both models are available in two lengths: 1000 mm and 3000 mm. Possibility of assembly with different source modules: the WIDE diffusing module, the ACCENT module with UGR control lower than 19, the TRACK or PENDANT modules for SPOT illumination with different emission angles. Integrated LEDs, possibility of color temperature of 3000 K or 4000 K; starting binning ≤3-Step MacAdam; min. 80% of luminous flux remaining after 50,000 h duration; IP20 protection; insulation class III. The 48V power supply gives great versatility and safety, with reversible settlement that can be modified if necessary. The system is suitable for environments where professional lighting with minimal design is required, such as OFFICES and SHOPS.







ideallux. | Arca

1.

Code 223087

Item name ARCA LENS 20° FOR TRACK 5W

Beam 20°

Measure Ø 3 x 1,2 cm







 Code
 223155 | 223162 | 223179

 Item name
 ARCA DRIVER ON/OFF

 Power
 60W | 90W | 150W

Output 48\

Current 1300 mA | 2000 mA | 3200 mA

Measure 171x62x37 mm

220x68x37 mm 228x68x37 mm