
## ideal lux. | Arca

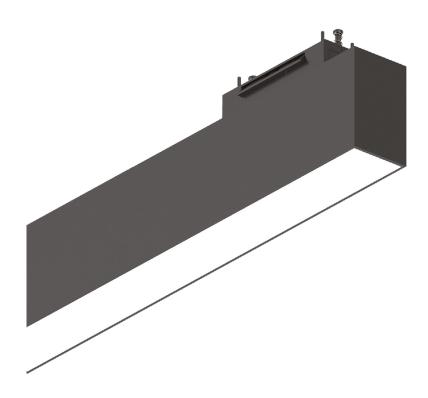

Code 223032

ARCA WIDE 60 CM 4000K Item name Source LED SMD SAMSUNG


25W Power Driver included No Driver available On/Off 4300 Lm Lumen SDCM 3 MacAdam 98° Beam

4000K CCT ≥80 CRI **UGR** 

LED Life

50.000 h Insulation class Class III 20

Material Aluminum Warranty 5 years Net Weight 0,700 Kg Volume 0,0087 m<sup>3</sup> Base / Hole 60,5 x 3,5 cm



## **LINEAR SYSTEM**

Extruded aluminum linear system compatible with a wide range of lighting fittings with mechanical fixing. The system is anodized and varnished. It is available in black color and for different kind of installations: ceiling, suspension, or flush in plasterboard ceilings. Modules can be assembled according to the desired arrangement. The body section for the ceiling and suspension versions is 42 mm wide and 85 mm high, while the body for recessed version is 86 mm wide and 90 mm high. Both models are available in two lengths: 1000 mm and 3000 mm. Possibility of assembly with different source modules: the WIDE diffusing module, the ACCENT module with UGR control lower than 13, the TRACK or PENDANT modules for SPOT illumination with different emission angles. The CORNER module for angle composition. Integrated LEDs, possibility of color temperature of 3000 K or 4000 K; starting binning ≤3-Step MacAdam; IP20 protection; insulation class III. The 48Vdc power supply gives great versatility and safety, with reversible settlement that can be modified if necessary. The system is suitable for environments where professional lighting with minimal design is required, such as OFFICES and SHOPS.



