



Code	223049
Item name	ARCA TRACK 14W 36° 4000K
Source	LED SMD CREE
Power	14W
Driver included	No
Driver available	On/Off
Lumen	1500 Lm
MacAdam	3SDC
Beam	36°
CCT	4000K
CRI	≥80
UGR	<19
LED Life	50.000 h
Insulation class	Class III
IP	20
Material	Aluminum
Warranty	5 years
Net Weight	0,460 Kg
Volume	0,0030 m³
Base / Hole	8,8 x 3,7 cm

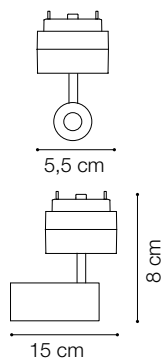

## LINEAR SYSTEM

Extruded aluminum linear system compatible with a wide range of lighting fittings with magnetic fixing and mechanical safety lock. The system is anodized and varnished. It is available in black color and for different kind of installations: ceiling, suspension, or flush in plasterboard ceilings. Modules can be assembled according to the desired arrangement. The body section for the ceiling and suspension versions is 42 mm wide and 85 mm high, while the body for recessed version is 86 mm wide and 90 mm high. Both models are available in two lengths: 1000 mm and 3000 mm. Possibility of assembly with different source modules: the WIDE diffusing module, the ACCENT module with UGR control lower than 19, the TRACK or PENDANT modules for SPOT illumination with different emission angles. Integrated LEDs, possibility of color temperature of 3000 K or 4000 K; starting binning ≤3-Step MacAdam; min. 80% of luminous flux remaining after 50,000 h duration; IP20 protection; insulation class III. The 48V power supply gives great versatility and safety, with reversible settlement that can be modified if necessary. The system is suitable for environments where professional lighting with minimal design is required, such as OFFICES and SHOPS.

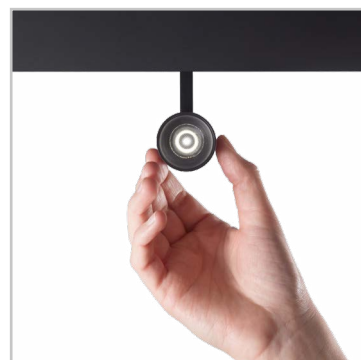

Suggestion

1.

Code 223094  
Item name ARCA LENS 18° FOR TRACK 14W  
Beam 18°  
Measure Ø 4,5 x 2,5 cm





Code	223155   223162   223179
Item name	ARCA DRIVER ON/OFF
Power	60W   90W   150W
Output	48V
Current	1300 mA   2000 mA   3200 mA
Measure	171x62x37 mm 220x68x37 mm 228x68x37 mm